


FIX-WALL

Colourless water repellency treatment. For vertical surfaces: brick, concrete, sandstone,...

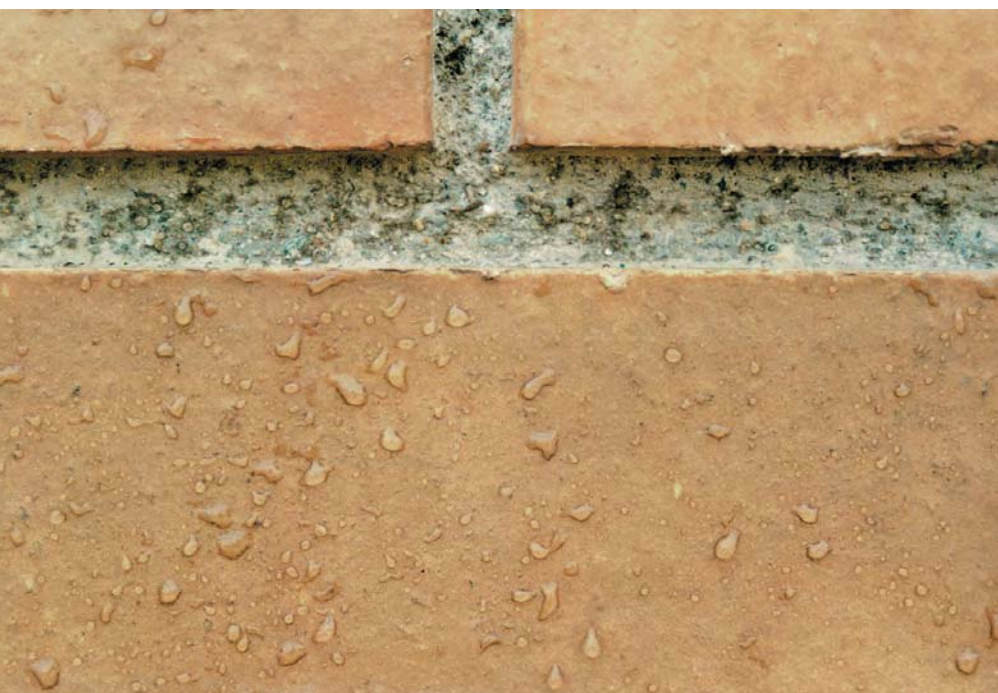

WARNING

FIX-WALL should not be used:

- ◆ At temperatures below +5°C.
- ◆ On porcelain or vitreous ceramic tiles
- ◆ Modifying the formula.
- ◆ Inside water deposits.
- ◆ On internal basement walls (apply **HIDROFIX**).

CONSUMPTION:

Apply until saturation two layers of **FIX-WALL**: approx.: 0.8 lt./m²

FIELDS OF APPLICATION

- 1) Walls or vertical surfaces, exposed/ face brick buildings, concrete, sandstone, limestone, marble, granite, natural stones, etc.
- 2) Since it is waterproof, it avoids the later appearance of efflorescent stains.
- 3) Can be used **INDOORS** and **OUTDOORS**.

TECHNICAL CHARACTERISTICS

FIX-WALL is a colourless mixture of polymers with an aqueous base that waterproofs conveniently treated surfaces. The water-repellent effect is greater in relation to the depth of the penetration of the product; 2 or 3 layers are recommended.

FIX-WALL does not significantly reduce the permeability to water vapour and does not modify the surface's original texture or colour.

STORAGE

In the original packaging, well closed and stored in covered and well-ventilated areas: 24 months.
Do not expose to cold temperatures.

PACKAGING

FIX-WALL is available in the following formats: 1 lt. and 5 lt.

TREATMENT:

Stone façades, marble, sandstone, etc
Cement mortar, concrete,...

Optional washing as needed:
vapour or/and **GRESNET**
treatment diluted 1:20;
rinsed with water (10lt./100 sqm)

Face brick façades

Optional washing as needed:
GRESNET plus pure application;
rinse with water.
Consumption: 70lt./100 sqm

Let dry

Support should be
CLEAN and DRY
(increases the
penetration
of the product)

1^a layer

FIX-WALL
0,4lt./sqm
(apply until
saturated)

after
24 hours

2^a layer

FIX-WALL
0,4lt./sqm
(apply until
saturated)

(apply the products with brush, sponge or airless)